

King Cable™


Features:

- must be installed in the extended position (no slack)
- cable reaches across hose fittings to provide standby safety for hose
- spring-loaded loops in the cable ends open easily to pass over the couplings for a firm grip on the hose
- no tools needed - easy to install and remove
- cables shipped with safety restraint labels attached
- highly resistant to rust and corrosion
- hose-to-hose or hose-to-rigid outlet
- maximum operating pressure: **200 PSI**
- minimizes damage to equipment and injuries to operators in the event hose, couplings or clamps fail, or there is an accidental separation of the assembly




Materials:

- For WB1, WB3, WA2, WA4, WSR1, WSR3, WSR2, WSR4, WSR1C, WB1C, WSR1E:
 - wire rope: galvanized carbon steel
 - ferrules: aluminum
 - springs: galvanized carbon steel
- For WB1SS, WA2SS, WSR1SS, WSR2SS:
 - wire rope: 304 stainless steel
 - ferrules: copper
 - springs: 304 stainless steel
- For WA2B:
 - wire rope: galvanized carbon steel
 - ferrules: copper
 - springs: galvanized carbon steel

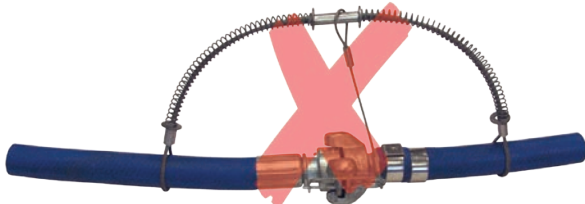

incorrect installation

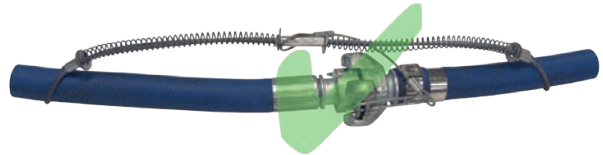

correct installation



hose end

tool end

Style WSR, for hose-to-tool service

Hose ID	Cable	Length	Maximum Working Pressure (PSI)	Steel		Stainless Steel	
				Part #	Price/E	Part #	Price/E
1/2" - 1 1/4"	1/8"	20 1/4"	200	WSR1	\$18.45	WSR1SS	\$48.25
1/2" - 2"	3/16"	28"	200	WSR3	26.50	---	---
1 1/2" - 3"	1/4"	38"	200	WSR2	29.10	WSR2SS	101.80
4"	3/8"	44"	200	WSR4	64.40	---	---



hose end

hose end

Style W, for hose-to-hose service

Hose ID	Cable	Length	Maximum Working Pressure (PSI)	Steel		Stainless Steel	
				Part #	Price/E	Part #	Price/E
1/2" - 1 1/4"	1/8"	20 1/4"	200	WB1	\$18.45	WB1SS	\$51.05
1/2" - 2"	3/16"	28"	200	WB3	27.35	---	---
1 1/2" - 3"	1/4"	38"	200	WA2	30.00	WA2SS	107.10
4"	3/8"	44"	200	WA4	64.45	---	---

King Cable™ Options



WB1C

WB1 with safety clip and lanyard



WSR1E

WSR1E with stainless steel marine eye

Hose ID	Cable	Part #	Description	Max. Work. Press. PSI	Price/E
1/2" - 1 1/4"	1/8"	WSR1C	WSR1 with safety clip and lanyard used to lock Air King™ couplings	200	\$32.10
1/2" - 1 1/4"	1/8"	WB1C	WB1 with safety clip and lanyard used to lock Air King™ couplings	200	31.55
1/2" - 1 1/4"	1/8"	WSR1E	WSR1 with stainless steel safety marine eye used to connect safety cable to a bolt on tool	200	59.00
1 1/2" - 3"	1/4"	WA2B	WA2 with bronze/copper ferrule for special environmental conditions	200	60.10

• see page 808 for OSHA regulations