


Super Blue Ribbon® V-Belt

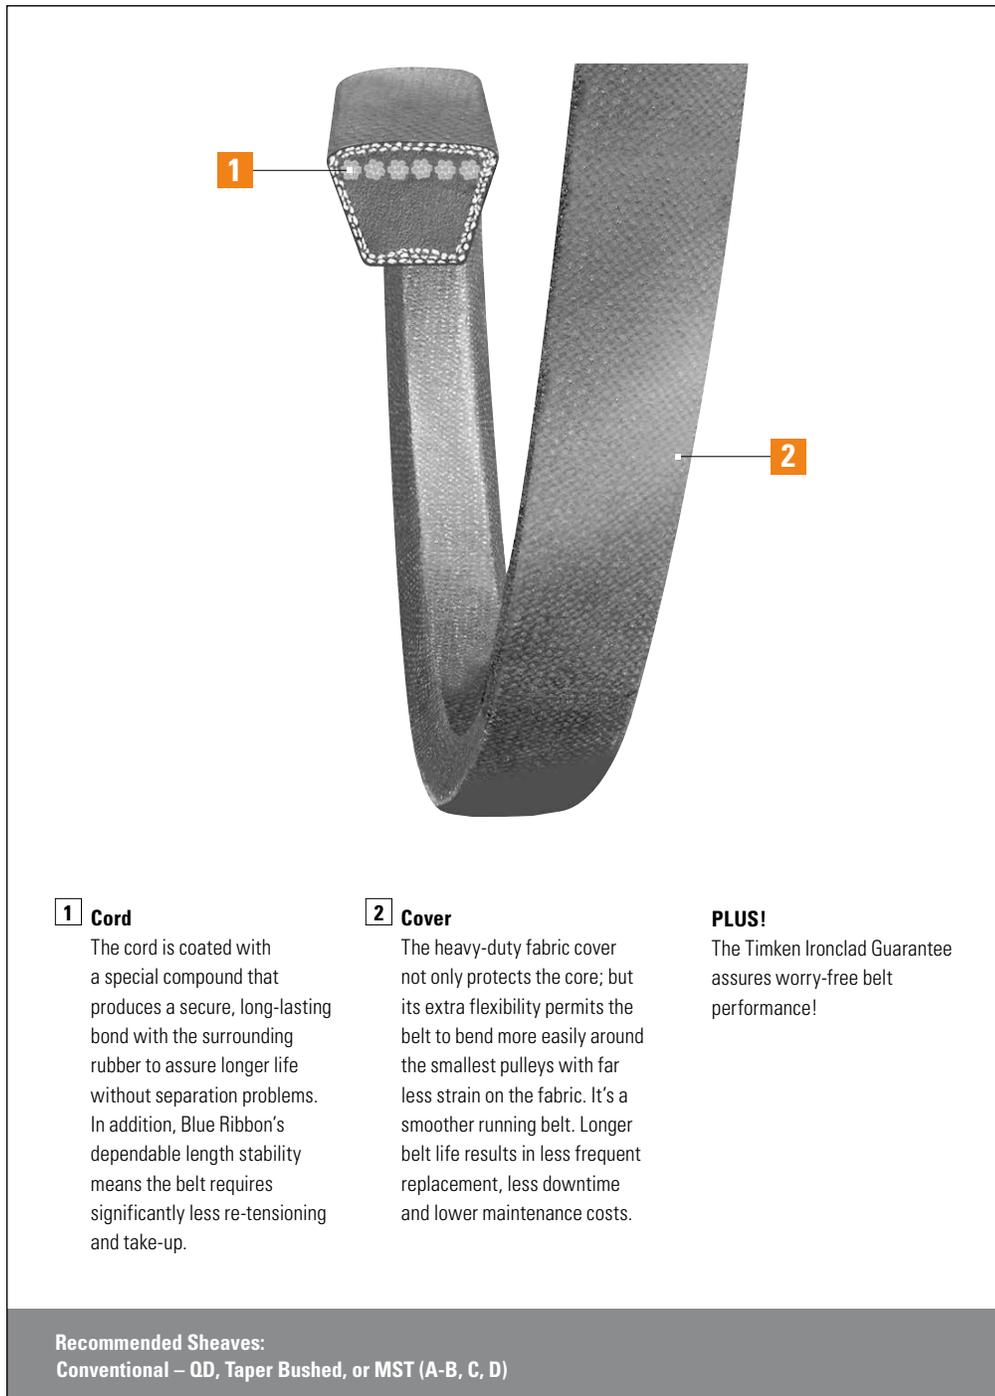

1 Cord
The cord is coated with a special compound that produces a secure, long-lasting bond with the surrounding rubber to assure longer life without separation problems. In addition, Blue Ribbon's dependable length stability means the belt requires significantly less re-tensioning and take-up.

2 Cover
The heavy-duty fabric cover not only protects the core; but its extra flexibility permits the belt to bend more easily around the smallest pulleys with far less strain on the fabric. It's a smoother running belt. Longer belt life results in less frequent replacement, less downtime and lower maintenance costs.

PLUS!
The Timken Ironclad Guarantee assures worry-free belt performance!

Recommended Sheaves:
Conventional – OD, Taper Bushed, or MST (A-B, C, D)

The finest wrapped belt in the industry

Super rated at standard prices

Longer life


checkmate®
matching

Applications:
Mixers
Pumps
Conveyors
HVAC
Anything and everything & More

Heavy Duty V-Belts

Super Blue Ribbon®

V-Belt

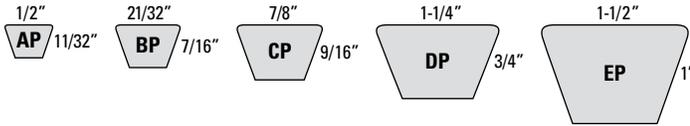

The finest wrapped belt in the industry and workhorse of classical v-belts.

Heavy-Duty Cover – Stress-relieved fabric cover flexes better than ordinary fabric to improve belt life, and assures a smooth transfer of power.

Super Blue's resistance to oil, heat, weather and aggressive environmental conditions is outstanding.

Super Blue Ribbon® v-belts operate within a wide range of load capacities and speeds – with rated performance from 100 to 8,000 RPM and horsepower capability from 1 to 1,100 horsepower.

Super Blue Ribbon is the ideal choice for dependable performance on an extremely wide range of applications – A, B, C, D, and E sections – single or multiple drive.



Super Blue Ribbon® V-Belt

Super Blue Ribbon® Part Numbers

Part Number Example: **AP50** = **A** **P** **50**
↓ ↓ ↓
Cross Wrapped Molded Inside Circumference
Section Construction (inches)

Part Number	Outside Circumference	Weight (lbs)
A Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (A-B)		
AP20	22.3	0.11
AP21	23.3	0.14
AP22	24.3	0.15
AP23	25.3	0.15
AP24	26.3	0.16
AP25	27.3	0.17
AP26	28.3	0.17
AP27	29.3	0.18
AP28	30.3	0.19
AP29	31.3	0.19
AP30	32.3	0.20
AP31	33.3	0.21
AP32	34.3	0.21
AP33	35.3	0.22
AP34	36.3	0.22
AP35	37.3	0.23
AP36	38.3	0.24
AP37	39.3	0.24
AP38	40.3	0.25
AP39	41.3	0.26
AP40	42.3	0.26
AP41	43.3	0.27
AP42	44.3	0.27
AP43	45.3	0.28
AP44	46.3	0.29
AP45	47.3	0.29
AP46	48.3	0.30
AP47	49.3	0.31
AP48	50.3	0.31
AP49	51.3	0.32
AP50	52.3	0.32
AP51	53.3	0.33
AP52	54.3	0.34

Part Number	Outside Circumference	Weight (lbs)
A Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (A-B)		
AP53	55.3	0.34
AP54	56.3	0.35
AP55	57.3	0.36
AP56	58.3	0.36
AP57	59.3	0.37
AP58	60.3	0.37
AP59	61.3	0.38
AP60	62.3	0.39
AP61	63.3	0.39
AP62	64.3	0.40
AP63	65.3	0.41
AP64	66.3	0.41
AP65	67.3	0.41
AP66	68.3	0.43
AP67	69.3	0.43
AP68	70.3	0.44
AP69	71.3	0.44
AP70	72.3	0.45
AP71	73.3	0.46
AP72	74.3	0.46
AP73	75.3	0.46
AP74	76.3	0.47
AP75	77.3	0.48
AP76	78.3	0.48
AP77	79.3	0.49
AP78	80.3	0.49
AP79	81.3	0.50
AP80	82.3	0.51
AP81	83.3	0.51
AP82	84.3	0.52
AP83	85.3	0.52
AP84	86.3	0.53
AP85	87.3	0.54

Heavy Duty V-Belts

Super Blue Ribbon®

V-Belt

Super Blue Ribbon® Part Numbers

Part Number	Outside Circumference	Weight (lbs)
A Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (A-B)		
AP86	88.3	0.55
AP87	89.3	0.55
AP88	90.3	0.56
AP89	91.3	0.56
AP90	92.3	0.58
AP91	93.3	0.57
AP92	94.3	0.58
AP93	95.3	0.60
AP94	96.3	0.60
AP95	97.3	0.60
AP96	98.3	0.61
AP97	99.3	0.61
AP98	100.3	0.62
AP99	101.3	0.62
AP100	102.3	0.64
AP101	103.3	0.64
AP102	104.3	0.64
AP103	105.3	0.65
AP104	106.3	0.66
AP105	107.3	0.66
AP108	110.3	0.70
AP110	112.3	0.69
AP112	114.3	0.70
AP114	116.3	0.74
AP115	117.3	0.74
AP116	118.3	0.75
AP118	120.3	0.76
AP120	122.3	0.75
AP124	126.3	0.78
AP125	127.3	0.78
AP126	128.3	0.79
AP127	129.3	0.80
AP128	130.3	0.80

Part Number	Outside Circumference	Weight (lbs)
A Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (A-B)		
AP130	132.3	0.82
AP133	135.3	0.84
AP134	136.3	0.84
AP136	138.3	0.85
AP140	142.3	0.88
AP141	143.3	0.88
AP144	146.3	0.90
AP148	150.3	0.95
AP158	160.3	1.01
AP162*	164.3	1.04
AP173	175.3	1.11
AP180	182.3	1.15
AP220*	222.3	1.38
B Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (A-B)		
BP23	26.3	0.20
BP24	27.3	0.21
BP25	28.3	0.22
BP26	29.3	0.23
BP27	30.3	0.24
BP28	31.3	0.31
BP29	32.3	0.25
BP30	33.3	0.33
BP31	34.3	0.27
BP32	35.3	0.35
BP33	36.3	0.36
BP34	37.3	0.37
BP35	38.3	0.38
BP36	39.3	0.39
BP37	40.3	0.41
BP38	41.3	0.42
BP39	42.3	0.43
BP40	43.3	0.44

Super Blue Ribbon® V-Belt

Part Number Example: **BP50** = **B** **P** **50**
↓ ↓ ↓
Cross Wrapped Molded Inside Circumference
Section Construction (inches)

Part Number	Outside Circumference	Weight (lbs)
B Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (A-B)		
BP41	44.3	0.44
BP42	45.3	0.45
BP43	46.3	0.47
BP44	47.3	0.48
BP45	48.3	0.49
BP46	49.3	0.50
BP47	50.3	0.51
BP48	51.3	0.52
BP49	52.3	0.53
BP50	53.3	0.54
BP51	54.3	0.55
BP52	55.3	0.56
BP53	56.3	0.57
BP54	57.3	0.58
BP55	58.3	0.59
BP56	59.3	0.60
BP57	60.3	0.61
BP58	61.3	0.62
BP59	62.3	0.63
BP60	63.3	0.64
BP61	64.3	0.65
BP62	65.3	0.66
BP63	66.3	0.67
BP64	67.3	0.68
BP65	68.3	0.69
BP66	69.3	0.70
BP67	70.3	0.71
BP68	71.3	0.72
BP69	72.3	0.74
BP70	73.3	0.74
BP71	74.3	0.75
BP72	75.3	0.77
BP73	76.3	0.78

Part Number	Outside Circumference	Weight (lbs)
B Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (A-B)		
BP74	77.3	0.79
BP75	78.3	0.80
BP76	79.3	0.81
BP77	80.3	0.82
BP78	81.3	0.83
BP79	82.3	0.84
BP80	83.3	0.85
BP81	84.3	0.86
BP82	85.3	0.87
BP83	86.3	0.88
BP84	87.3	0.89
BP85	88.3	0.90
BP86	89.3	0.91
BP87	90.3	0.92
BP88	91.3	0.93
BP89	92.3	0.92
BP90	93.3	0.95
BP91	94.3	0.94
BP92	95.3	0.97
BP93	96.3	0.98
BP94	97.3	0.97
BP95	98.3	1.00
BP96	99.3	1.01
BP97	100.3	1.02
BP98	101.3	1.01
BP99	102.3	1.02
BP100	103.3	1.06
BP101	104.3	1.04
BP102	105.3	1.05
BP103	106.3	1.09
BP104	107.3	1.07
BP105	108.3	1.11
BP106	109.3	1.09

Heavy Duty V-Belts

Super Blue Ribbon®

V-Belt

Super Blue Ribbon® Part Numbers

Part Number	Outside Circumference	Weight (lbs)
B Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (A-B)		
BP107	110.3	1.10
BP108	111.3	1.14
BP109	112.3	1.12
BP110	113.3	1.13
BP111	114.3	1.14
BP112	115.3	1.18
BP113	116.3	1.16
BP114	117.3	1.17
BP115	118.3	1.18
BP116	119.3	1.22
BP117	120.3	1.20
BP118	121.3	1.21
BP119	122.3	1.22
BP120	123.3	1.26
BP122	125.3	1.24
BP123	126.3	1.25
BP124	127.3	1.27
BP125	128.3	1.27
BP126	129.3	1.29
BP128	131.3	1.31
BP130	133.3	1.33
BP131	134.3	1.33
BP132	135.3	1.35
BP133	136.3	1.36
BP134	137.3	1.37
BP135	138.3	1.38
BP136	139.3	1.39
BP138	141.3	1.41
BP140	143.3	1.43
BP141	144.3	1.44
BP142	145.3	1.45
BP144	147.3	1.48
BP146	149.3	1.49

Part Number	Outside Circumference	Weight (lbs)
B Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (A-B)		
BP148	151.3	1.51
BP150	153.3	1.53
BP151	154.3	1.54
BP152	155.3	1.55
BP154	157.3	1.57
BP156	159.3	1.59
BP157	160.3	1.60
BP158	161.3	1.61
BP160	163.3	1.64
BP161	164.3	1.65
BP162	165.3	1.66
BP164	167.3	1.68
BP165	168.3	1.69
BP168	171.3	1.72
BP170	173.3	1.74
BP172	175.3	1.76
BP173	176.3	1.77
BP175	178.3	1.79
BP176	179.3	1.80
BP180	183.3	1.84
BP182	185.3	1.86
BP184	187.3	1.88
BP190	193.3	1.94
BP191	194.3	1.95
BP195	198.3	1.99
BP198	201.3	2.02
BP203	206.3	2.05
BP205	208.3	2.07
BP210	213.3	2.12
BP214	217.3	2.16
BP217*	220.3	2.19
BP220	223.3	2.22
BP221	224.3	2.23

Super Blue Ribbon® V-Belt

Part Number Example: **CP50** = **C** **P** **50**
↓ ↓ ↓
Cross Wrapped Molded Inside Circumference
Section Construction (inches)

Part Number	Outside Circumference	Weight (lbs)
B Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (A-B)		
BP224*	227.3	2.25
BP225	228.3	2.26
BP228	231.3	2.30
BP240	241.7	2.41
BP250	251.7	2.52
BP253*	254.7	2.55
BP255	256.7	2.56
BP265	266.7	2.67
BP270	271.7	2.71
BP280	281.7	2.81
BP285	286.7	2.86
BP300	301.7	3.01
BP315	316.7	3.16
BP330	331.7	3.31
BP360	361.7	3.68
BP361*	362.7	3.70
BP364*	365.7	3.80
BP433*	434.7	4.43
BP443*	444.7	4.53
BP512	513.7	5.22
BP543*	544.7	5.53
BP553*	554.7	5.64
C Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (C)		
CP46	50.4	0.79
CP50	54.4	0.91
CP51	55.4	0.98
CP53	57.4	1.01
CP54	58.4	1.04
CP55	59.4	1.06
CP56	60.4	1.01
CP57	61.4	1.04
CP58	62.4	1.00

Part Number	Outside Circumference	Weight (lbs)
C Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (C)		
CP60	64.4	1.15
CP61	65.4	1.16
CP62	66.4	1.18
CP63	67.4	1.20
CP64	68.4	1.22
CP65	69.4	1.10
CP66	70.4	1.25
CP67	71.4	1.27
CP68	72.4	1.29
CP69	73.4	1.30
CP70	74.4	1.27
CP71	75.4	1.34
CP72	76.4	1.36
CP73	77.4	1.38
CP74	78.4	1.40
CP75	79.4	1.46
CP76	80.4	1.49
CP77	81.4	1.50
CP78	82.4	1.52
CP79	83.4	1.54
CP80	84.4	1.55
CP81	85.4	1.58
CP82	86.4	1.59
CP83	87.4	1.61
CP84	88.4	1.63
CP85	89.4	1.65
CP86	90.4	1.67
CP87	91.4	1.69
CP88	92.4	1.71
CP89	93.4	1.73
CP90	94.4	1.74
CP91	95.4	1.76
CP92	96.4	1.79

Heavy Duty V-Belts

Super Blue Ribbon®

V-Belt

Super Blue Ribbon® Part Numbers

Part Number	Outside Circumference	Weight (lbs)
C Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (C)		
CP93	97.4	1.81
CP94	98.4	1.82
CP95	99.4	1.84
CP96	100.4	1.86
CP97	101.4	1.88
CP98	102.4	1.90
CP99	103.4	1.92
CP100	104.4	1.94
CP101	105.4	1.96
CP102	106.4	1.97
CP103	107.4	1.99
CP104	108.4	2.01
CP105	109.4	2.03
CP106	110.4	2.04
CP107	111.4	2.07
CP108	112.4	2.09
CP109	113.4	2.10
CP110	114.4	2.12
CP111	115.4	2.14
CP112	116.4	2.16
CP113	117.4	2.18
CP114	118.4	2.20
CP115	119.4	2.22
CP116	120.4	2.23
CP117	121.4	2.25
CP118	122.4	2.27
CP119	123.4	2.29
CP120	124.4	2.31
CP121	125.4	2.33
CP122	126.4	2.34
CP123	127.4	2.37
CP124	128.4	2.38
CP125	129.4	2.40

Part Number	Outside Circumference	Weight (lbs)
C Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (C)		
CP126	130.4	2.42
CP127	131.4	2.44
CP128	132.4	2.46
CP129	133.4	2.48
CP130	134.4	2.50
CP131	135.4	2.52
CP132	136.4	2.53
CP133	137.4	2.55
CP134	138.4	2.57
CP135	139.4	2.59
CP136	140.4	2.61
CP137	141.4	2.63
CP138	142.4	2.66
CP139	143.4	2.57
CP140	144.4	2.68
CP141	145.4	2.70
CP142	146.4	2.72
CP143	147.4	2.74
CP144	148.4	2.76
CP145	149.4	2.78
CP146	150.4	2.80
CP147	151.4	2.81
CP148	152.4	2.83
CP149	153.4	2.85
CP150	154.4	2.87
CP151	155.4	2.89
CP152	156.4	2.91
CP153	157.4	2.93
CP154	158.4	2.95
CP155	159.4	2.97
CP156	160.4	2.98
CP157	161.4	3.00
CP158	162.4	3.02

Super Blue Ribbon®

V-Belt

Part Number Example: **CP200** = **C** **P** **200**
↓ ↓ ↓
Cross Wrapped Molded Inside Circumference
Section Construction (inches)

Part Number	Outside Circumference	Weight (lbs)
C Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (C)		
CP159	163.4	3.04
CP160	164.4	3.06
CP161	165.4	3.08
CP162	166.4	3.10
CP163	167.4	3.12
CP164	168.4	3.13
CP165	169.4	3.15
CP166	170.4	3.17
CP167	171.4	3.19
CP168	172.4	3.21
CP169	173.4	3.23
CP170	174.4	3.25
CP171	175.4	3.27
CP172*	176.4	3.28
CP173	177.4	3.30
CP174	178.4	3.32
CP175	179.4	3.34
CP176	180.4	3.36
CP177	181.4	3.38
CP178	182.4	3.40
CP180	184.4	3.43
CP181	185.4	3.46
CP182	186.4	3.47
CP183	187.4	3.49
CP184	188.4	3.51
CP185	189.4	3.53
CP186	190.4	3.55
CP187	191.4	3.57
CP188	192.4	3.58
CP189	193.4	3.60
CP190	194.4	3.62
CP193	197.4	3.68
CP194	198.4	3.70

Part Number	Outside Circumference	Weight (lbs)
C Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (C)		
CP195	199.4	3.72
CP196	200.4	3.73
CP197	201.4	3.75
CP198	202.4	3.77
CP200	204.4	3.81
CP204	208.4	3.76
CP205	209.4	3.78
CP208	212.4	3.83
CP210	214.4	3.87
CP215	219.4	3.96
CP218	222.4	4.02
CP220	224.4	4.05
CP225	229.4	4.11
CP228	232.4	4.16
CP230	234.4	4.20
CP235	239.4	4.29
CP236*	240.4	4.31
CP240	242.5	4.38
CP245	247.5	4.47
CP248	250.5	4.52
CP250*	252.5	4.56
CP255	257.5	4.65
CP260	262.5	4.74
CP264*	266.5	4.81
CP265	267.5	4.83
CP269*	271.5	4.90
CP270	272.5	4.92
CP275	277.5	5.01
CP276*	278.5	5.03
CP280	282.5	5.12
CP285	287.5	5.19
CP290	292.5	5.28
CP297*	299.5	5.41

Heavy Duty V-Belts

Super Blue Ribbon®

V-Belt

Super Blue Ribbon® Part Numbers

Part Number	Outside Circumference	Weight (lbs)
C Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (C)		
CP300	302.5	5.47
CP314*	316.5	5.72
CP315	317.5	5.74
CP330	332.5	6.01
CP340*	342.5	6.19
CP345	347.5	6.28
CP360	362.5	6.65
CP390	392.5	7.20
CP420	422.5	7.75
D Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (D)		
DP88*	93.5	3.02
DP90	95.5	3.08
DP96	101.5	3.28
DP100	105.5	3.41
DP101*	106.5	3.45
DP104	109.5	3.54
DP105	110.5	3.58
DP108	113.5	3.68
DP112	117.5	3.81
DP115*	120.5	3.91
DP120	125.5	4.33
DP124*	129.5	4.13
DP128	133.5	4.61
DP132	137.5	4.47
DP135	140.5	4.57
DP136	141.5	4.60
DP144	149.5	4.85
DP152	157.5	5.11
DP158	163.5	5.31
DP160*	165.5	5.37
DP162	167.5	5.44
DP164	169.5	5.50

Part Number	Outside Circumference	Weight (lbs)
D Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (D)		
DP165	170.5	5.54
DP166	171.5	5.57
DP170*	175.5	5.70
DP171	176.5	5.73
DP173	178.5	5.80
DP178	183.5	5.96
DP180	185.5	6.03
DP189	194.5	6.33
DP195	200.5	6.52
DP210	215.5	7.02
DP225	230.5	7.43
DP230*	235.5	7.59
DP240	243.0	7.92
DP255	258.0	8.41
DP260*	263.0	8.58
DP270	273.0	8.91
DP280	283.0	9.23
DP285	288.0	9.40
DP300	303.0	9.89
DP315	318.0	10.38
DP330	333.0	10.88
DP345	348.0	11.37
DP360	363.0	12.01
DP390	393.0	13.01
DP420	423.0	14.01
DP450*	453.0	15.20
DP480*	483.0	16.20
DP540	543.0	18.22
DP600*	603.0	20.60
DP660*	663.0	22.25

Super Blue Ribbon® V-Belt

Part Number Example: **DP300** = **D** **P** **300**
↓ ↓ ↓
Cross Wrapped Molded Inside Circumference
Section Construction (inches)

Part Number	Outside Circumference	Weight (lbs)
E Section – Recommended Sheaves: Conventional – OD, Taper Bushed, or MST (E*)		
EP144*	150.2	7.90
EP180*	186.2	9.82
EP195*	201.2	10.70
EP210*	216.2	11.42
EP225*	231.2	12.03
EP240	243.7	12.83
EP270	273.7	14.43
EP300	303.7	16.02
EP330	333.7	17.62
EP360	363.7	19.32
EP390*	393.7	20.93
EP420*	423.7	22.54
EP441*	444.7	23.70
EP480*	483.7	25.75
EP540*	543.7	28.96
EP600*	603.7	32.20
EP660*	663.7	35.39

*Non-stock item. Minimum order quantity and/or extended lead times may apply. Contact customer service for availability.

Heavy Duty V-Belts